
5.7.4 **BR04_RF150_IP** - incombustible pipe on floor ≥ 150 mm - TECNOBRICK

Description

- Rigid floor (concrete, aerated concrete or masonry) - thickness ≥ 150 mm.
- Sealing with TECNOBRICK sponges for a minimum depth of 150 mm inside the support.
- Maximum aperture size 1050x570 mm.

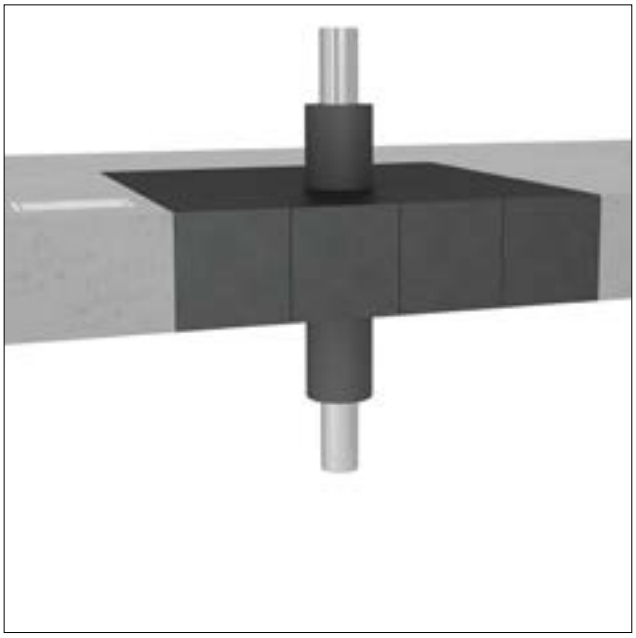

Classification and field of application

Type of pipe	Diameter [mm]	Insulation	Classification
Incombustible	≤ 108	≤ 40	EI 180 (C/C)
Copper	≤ 20	≤ 20	EI 180 (C/C)