
5.7.7 **BR05_FRW120_E** - electrical services on flexible/rigid wall ≥ 120 mm - TECNOBRICK

Description

- Flexible wall (plasterboard) - thickness ≥ 120 mm.
- Rigid wall (concrete, aerated concrete or masonry) - thickness ≥ 120 mm.
- Position only one TECNOBRICK in depth (horizontal or vertical) and close the hole in height.
- Maximum aperture size 1050x570 mm.



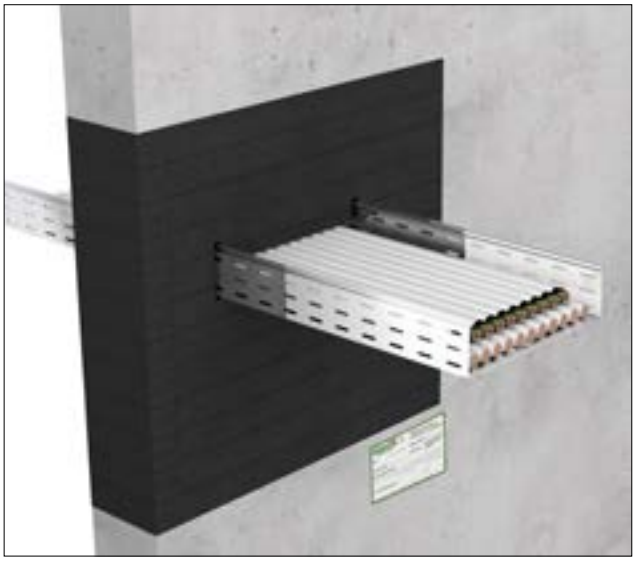

Classification and field of application

Type of electrical service	Diameter [mm]	Classification
Single or bundled electrical cables in tray	Cable ≤ 21	EI 120
Corrugated pipe	Bundle of 5 pipes diameter 21.2 mm	EI 120