
5.10.13 **S40_TW100_IP** - incombustible pipes ontimber wall ≥ 100 mm - TECNO-S 240

Description

- Timber wall - thickness ≥ 100 mm.
- Sealing on both sides.
- Pipe insulation CI\LI.

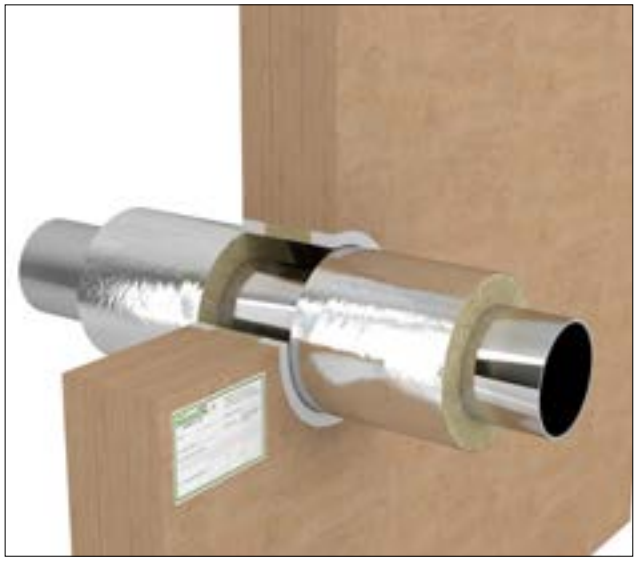

Classification and field of application

Type of pipe	Diameter [mm]	Insulation	Sealant depth [mm]	Backing	Classification
Incombustible	≤ 273	80 kg/m^3 stone wool 30 mm thick	25	33 kg/m^3 stone wool 25 mm thick	EI 60 (C/C)
Copper	≤ 54	80 kg/m^3 stone wool 30 mm thick	25	33 kg/m^3 stone wool 25 mm thick	EI 60 (C/C)