
5.4.7 **W03_FRW100_MP** - multilayer pipes on flexible/rigid wall ≥ 100 mm - TECNOWRAP

Description

- Flexible wall (plasterboard) - thickness ≥ 100 mm.
- Rigid wall (concrete, aerated concrete or masonry) - thickness ≥ 100 mm.
- Sealing with double TECNOBOARD panel.
- CS insulation in 25 mm thick polyethylene.
- Application around the pipe of the TECNOWRAP inside the support in correspondence with TECNOBOARD panels.



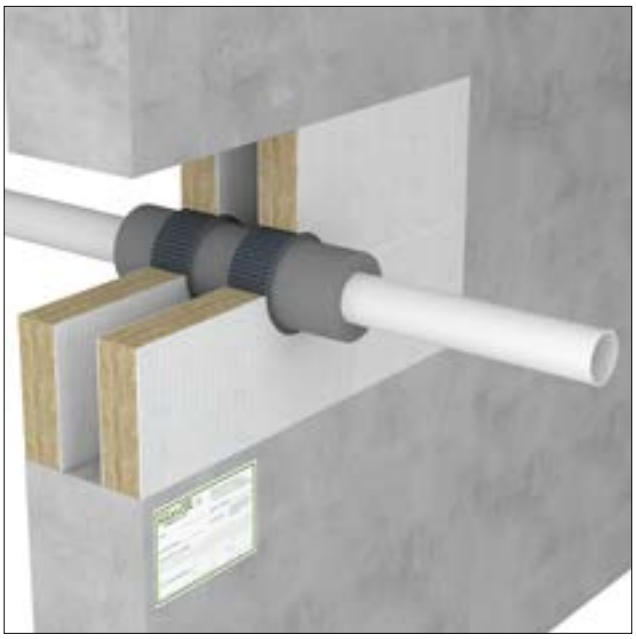

Classification and field of application

Type of pipe	Diameter [mm]	TECNOWRAP thickness [mm]	Classification
Multilayer pipe	≤ 75	50x3.6 (2 turns)	EI 120 C/C