

MARVON

5.4.3 **W05_FRW100_IP** - incombustible pipes on flexible/rigid wall ≥ 100 mm - TECNOWRAP

Description

- Flexible wall (plasterboard) - thickness ≥ 100 mm.
- Rigid wall (concrete, aerated concrete or masonry) - thickness ≥ 100 mm.
- Sealing with double TECNOBOARD panel.
- Pipe insulation CS.
- Application around the pipe of the TECNOWRAP seal on both sides of the wall (TECNOWRAP depth 100 mm).

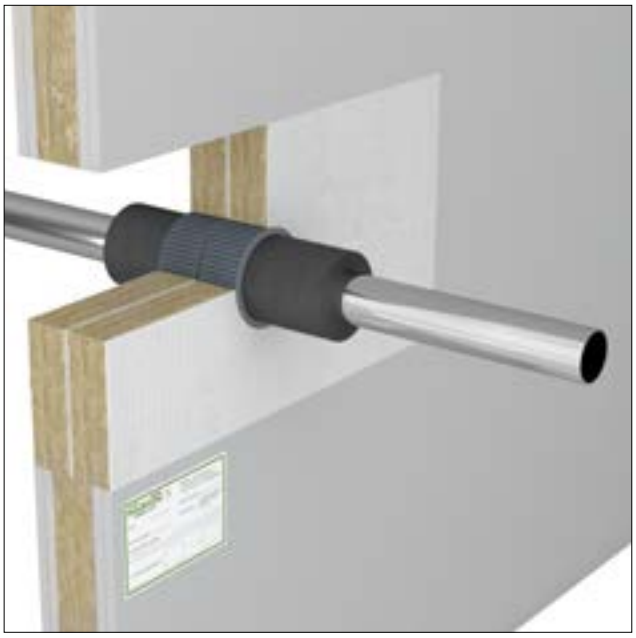

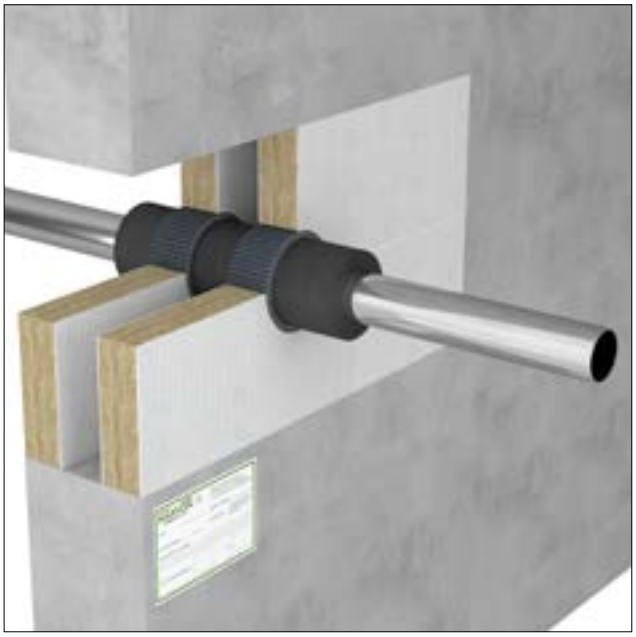

Classification and field of application

Type of pipe	Diameter [mm]	Insulation	TECNOWRAP thickness [mm]	Classification
Incombustible	≤ 324	50 mm combustible	50x5.4 (3 turns)	EI 90 C/U
Copper	≤ 12	9 mm combustible	50x3.6 (2 turns)	EI 120 C/C
		13 mm combustible		EI 90 C/C
	≤ 54	25 mm combustible		EI 60 C/C