
5.4.4 **W08_TW100_IP** - incombustible pipes ontimber wall ≥ 100 mm - TECNOWRAP

Description

- Timber wall - thickness ≥ 100 mm.
- Sealing with double TECNOBOARD panel.
- Pipe insulation CS.
- Application around the pipe of the TECNOWRAP, on both sides, in correspondence with the TECNOBOARD panel.
- The TECNOBOARD panel must be fixed to the outside of the support overlapping it by 100 mm with 300 mm pitch screws.
- Maximum passage 1200x600 mm.

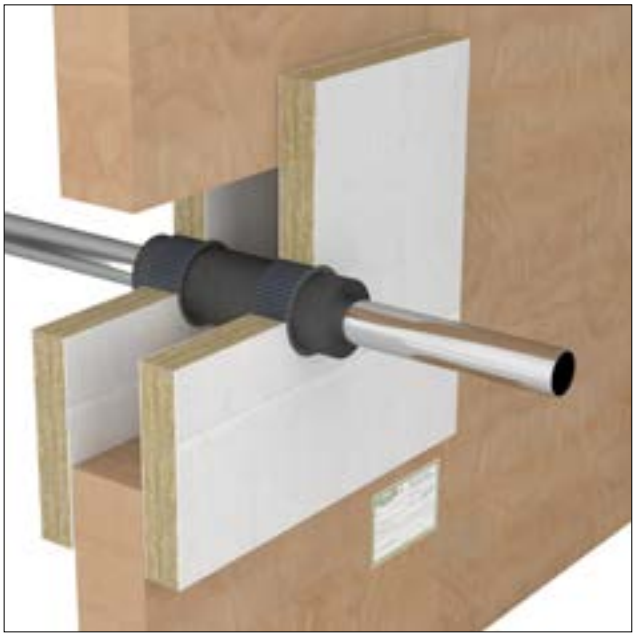

Classification and field of application

Type of pipe	Diameter [mm]	Insulation	TECNOWRAP thickness [mm]	Classification
Incombustible	≤ 324	50 mm combustible	50x5.4 (3 turns)	EI 90 C/U
Copper	≤ 12	9 mm combustible	50x3.6 (2 turns)	EI 120 C/C
		13 mm combustible		EI 90 C/C
	≤ 54	25 mm combustible		EI 60 C/C