
5.4.8 **W09_TW100_MP** - multilayer pipes ontimber wall ≥ 100 mm - TECNOWRAP

Description

- Timber wall - thickness ≥ 100 mm.
- Sealing with double TECNOBOARD panel.
- CS insulation in 25 mm thick polyethylene.
- Application around the pipe of the TECNOWRAP inside the support in correspondence with TECNOBOARD panels.
- The TECNOBOARD panel must be fixed to the outside of the support overlapping it by 100 mm with 300 mm pitch screws.
- Maximum passage 1200x600 mm.

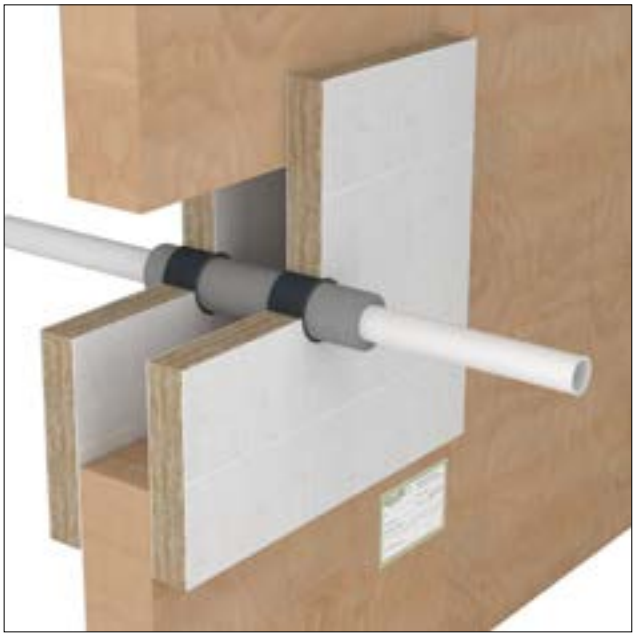

Classification and field of application

Type of pipe	Diameter [mm]	TECNOWRAP thickness [mm]	Classification
Multilayer pipe	≤ 75	50x3.6 (2 turns)	EI 120 C/C